


# Product datasheet

Specifications

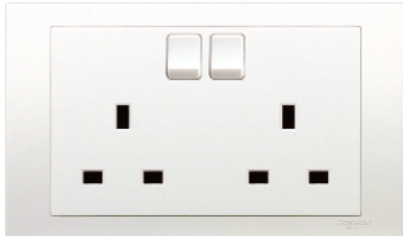

## 13A 250V Twin Gang Switched Socket

KB25

### Main

Range	Vivace
Product or component type	Switched socket
Device short name	KB25
Device application	Power supply
Device presentation	Complete product
Switch application	On/off switching
Main colour tint	White
Colour tint	White

### Complementary

Outlet poles configuration	2P + E
Number of gangs	2 gangs White
Material	Polycarbonate: grid plate Polycarbonate: surround Polycarbonate: base
Projecting depth	8 mm
Device mounting	Flush
Mounting support	Wall mounted
Fixing mode	By screw M3.5
Fixing center	120.6 mm
Embedding depth	22.0 mm
Rated current	13 A at 250 V AC, resistive
Network frequency	50/60 Hz
Contacts material	Brass and phosphor bronze
Connections - terminals	Pillar terminal
Terminal identifier	L N Earth
Tightening torque	0.4 N.m
Clamping connection capacity	3 x 2.5 mm <sup>2</sup> 2 x 4 mm <sup>2</sup>

Width	147 mm
Height	87 mm
Depth	35 mm

## Environment

Standards	SS 145 MS 589 BS 1362-2
Ambient air temperature for operation	0...40 °C
Ambient air temperature for storage	-5...60 °C
Relative humidity	0...95 %
Operating altitude	<= 2000 m
Environmental characteristic	Indoor use
IP degree of protection	IP20

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	168 g

## Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	<a href="#">China RoHS declaration</a> Pro-active China RoHS declaration (out of China RoHS legal scope)
RoHS exemption information	<a href="#">Yes</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>

## Contractual warranty

Warranty	18 months
----------	-----------

## Recommended replacement(s)