
Main

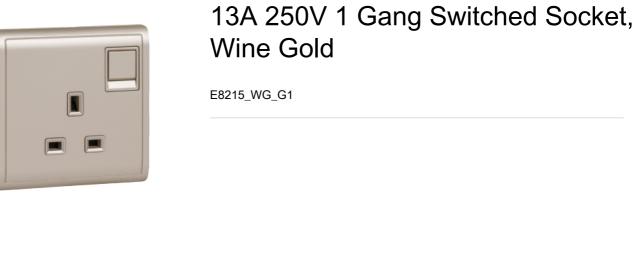

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Range	Pieno
Product or component type	Power socket-outlet
Switch function	Switch
Rated current	13 A at 250 V AC 5060 Hz
Number of gangs	1 gang
Load type	Resistive
Cover frame colour tint	Wine gold
Complementary	
Wiring device mounting	Flush Surface
Material	Polycarbonate: surround Polycarbonate: grid plate
Clamping connection capacity	2 x 4 mm² for stranded cable(s) 3 x 2.5 mm² for solid cable(s)
Width	87 mm
Height	87 mm
Depth	26.6 mm
Environment	
Ambient air temperature for operation	-540 °C
Relative humidity	095 %
Standards	BS 1363-2 SS 145-2 MS 589-2

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2.72 cm
Package 1 Width	8.7 cm
Package 1 Length	8.7 cm

Package 1 Weight	107.983 g
Unit Type of Package 2	CAR
Number of Units in Package 2	80
Package 2 Height	21 cm
Package 2 Width	32.5 cm
Package 2 Length	50 cm
Package 2 Weight	8638.64 g
Unit Type of Package 3	PAL
Number of Units in Package 3	1600
Package 3 Height	84 cm
Package 3 Width	82.5 cm
Package 3 Length	100 cm
Package 3 Weight	189772.8 g

Offer Sustainability

REACh Regulation	REACh Declaration
REACh free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information
Environmental Disclosure	Product Environmental Profile

Contractual warranty

Warranty 18 months

Recommended replacement(s)