



## Mallia™ Senses 13A Sockets


Cat. No(s): 2 811 10/11/12/13/14/15/16/17/18/19 MW - 2 811 10/11/12/13/14/15/16/17/18/19 MG  
2 811 10/11/12/13/14/15/16/17/18/19 MB - 2 811 10/11/12/13/14/15/16/17/18/19 DS  
2 811 10/11/12/13/14/15/16/17/18/19 CH - 2 811 10/11/12/13/14/15/16/17/18/19 DB  
2 811 10/11/12/13/14/15/16/17/18/19 BA - 2 811 10/11/12/13/14/15/16/17/18/19 BB  
2 811 10/11/12/13/14/15/16/17/18/19 BC




2 811 10 XX




2 811 11/14 XX




2 811 12 XX




2 811 13/15 XX



2 811 16 XX



2 811 17/19 XX



2 811 18 XX

### 1. USE

One and two gang switched and unswitched 13A socket outlets designed to accept BS 1363 fused plugs.  
(Supplied with M3.5 screws for Flush mounting or surface mounting 35mm deep BS boxes.)

### 2. RANGE

Designation	Cat. No.
1G BS 13A UNSWITCHED SOCKET	2 811 10 XX
1G BS 13A SINGLE POLE SWITCHED SOCKET	2 811 11 XX
2G BS 13A UNSWITCHED SOCKET	2 811 12 XX
2G BS 13A SINGLE POLE SWITCHED SOCKET WITH 2 EARTH TERMINAL	2 811 13 XX
1G BS 13A SINGLE POLE SWITCHED SOCKET +LED	2 811 14 XX
2G BS 13A SINGLE POLE SWITCHED SOCKET +LED	2 811 15 XX
1G BS 13A DOUBLE POLE SWITCHED SOCKET	2 811 16 XX
2G BS 13A DOUBLE POLE SWITCHED SOCKET	2 811 17 XX
1G BS 13A DOUBLE POLE SWITCHED SOCKET +LED	2 811 18 XX
2G BS 13A DOUBLE POLE SWITCHED SOCKET +LED	2 811 19 XX


### Colours

-Front: MW/MG/MB/DS/CH/DB/BA/BB/BC

-Rear: grey

2 81X XX MW	Matt White
2 81X XX MG	Matt Grey
2 81X XX MB	Matt Black
2 81X XX DS	Dark Silver
2 81X XX CH	Champagne
2 81X XX DB	Dark Bronze
2 81X XX BA	Brushed Aluminium
2 81X XX BB	Brushed Black
2 81X XX BC	Brushed Champagne

### 3. DIMENSIONS (mm)

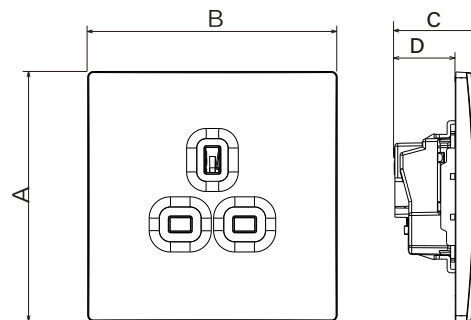

References	A	B	C	D
2 811 10 XX	86	86	28.2	18.5
2 811 11 XX	86	86	33.7	24.2
2 811 12 XX	86	146	26.5	19.3
2 811 13 XX	86	146	34.5	24.8
2 811 14 XX	86	86	33.7	24.2
2 811 15 XX	86	146	34.5	24.8
2 811 16 XX	86	86	30.9	21.1
2 811 17 XX	86	146	30.4	20.4
2 811 18 XX	86	86	30.9	21.1
2 811 19 XX	86	146	30.4	20.4

### 4. CONNECTION

Types of terminals: with screws

Terminal capacity: 3 × 2.5 mm<sup>2</sup>

3 × 4 mm<sup>2</sup>

2 × 6 mm<sup>2</sup>

Recommended stripping length: 12 mm

Recommended screwdriver size: <4 mm flat blade

# Mallia™ Senses 13A Sockets

Cat. No(s): 2 811 10/11/12/13/14/15/16/17/18/19 MW - 2 811 10/11/12/13/14/15/16/17/18/19 MG  
2 811 10/11/12/13/14/15/16/17/18/19 MB - 2 811 10/11/12/13/14/15/16/17/18/19 DS  
2 811 10/11/12/13/14/15/16/17/18/19 CH - 2 811 10/11/12/13/14/15/16/17/18/19 DB  
2 811 10/11/12/13/14/15/16/17/18/19 BA - 2 811 10/11/12/13/14/15/16/17/18/19 BB  
2 811 10/11/12/13/14/15/16/17/18/19 BC

## 5. TECHNICAL CHARACTERISTICS

### 5.1 Material characteristics

Rocker: PC

Frame: Steel

Base: PP

Self-extinguishing:

+ 850° C / 30 s for insulating parts holding live parts in place

+ 650° C / 30 s for other parts made of insulating materials

### 5.2 Electrical characteristics

Voltage: 250V~

Current: 13A

### 5.3 Climatic characteristics

Storage temperatures: -10°C to +70°C

Operating temperatures: -5°C to +50°C

### 5.4 Mechanical characteristics

Impact test: IK04

Protection against solids & liquids: IP20

## 6. CLEANING

Surface cleaning with a soft, slightly damp cloth.

Do not use: acetone, tar remover, trichloroethylene

## 7. CONFORMITY - APPROVALS

Conform to BS 1363-2; SS 145-2; MS 589-2.