


## Mallia™ Senses BS 5A Switched Socket

Cat. No(s): 2 811 32 MW - 2 811 32 MG - 2 811 32 MB  
2 811 32 DS - 2 811 32 CH - 2 811 32 DB  
2 811 32 BA - 2 811 32 BB - 2 811 32 BC



2 811 32 XX

### 1. USE

Switched socket outlets designed for 5A plugs.  
(Supplied with M3.5 screws for Flush mounting or surface mounting BS boxes.)

### 2. RANGE

| Designation                 | Cat. No.    |
|-----------------------------|-------------|
| 1Gang BS 5A Switched socket | 2 811 32 XX |


#### Colours

-Front: MW/MG/MB/DS/CH/DB/BA/BB/BC

-Rear: grey

|             |                   |
|-------------|-------------------|
| 2 811 32 MW | Matt White        |
| 2 811 32 MG | Matt Grey         |
| 2 811 32 MB | Matt Black        |
| 2 811 32 DS | Dark Silver       |
| 2 811 32 CH | Champagne         |
| 2 811 32 DB | Dark Bronze       |
| 2 811 32 BA | Brushed Aluminium |
| 2 811 32 BB | Brushed Black     |
| 2 811 32 BC | Brushed Champagne |

### 3. DIMENSIONS (mm)

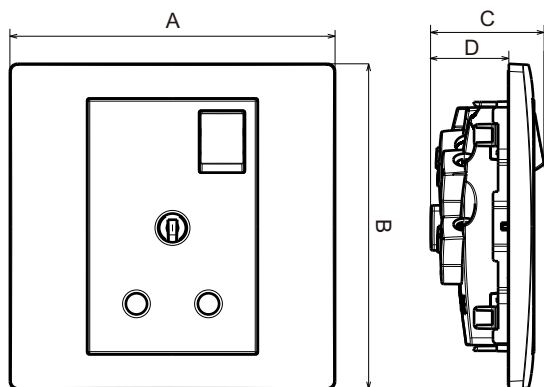

| References  | A  | B  | C  | D    |
|-------------|----|----|----|------|
| 2 811 32 XX | 86 | 86 | 30 | 20.7 |

### 4. CONNECTION

Types of terminals: with screws

Terminal capacity: 3×2.5 mm<sup>2</sup>

2×4 mm<sup>2</sup>

1×6 mm<sup>2</sup>

Recommended stripping length: 12 mm

Recommended screwdriver size: <4 mm flat blade

### 5. TECHNICAL CHARACTERISTICS

#### 5.1 Material characteristics

Plate/Rocker: PC

Frame: Steel

Base: PP

Self-extinguishing:

+ 850° C / 30 s for insulating parts holding live parts in place

+ 650° C / 30 s for other parts made of insulating materials

#### 5.2 Electrical characteristics

Voltage: 250V~

Current: 5A

#### 5.3 Climatic characteristics

Storage temperatures: -10°C to +70°C

Operating temperatures: -5°C to +50°C

#### 5.4 Mechanical characteristics

Impact test: IK04

Protection against solids & liquids: IP20

### 6. CLEANING

Surface cleaning with a soft, slightly damp cloth.

Do not use: acetone, tar remover, trichloroethylene

### 7. CONFORMITY - APPROVALS

Conform to BS 546.